

# round pilot light $\varnothing$ 22 - green - integral LED - 220 V DC - screw clamp terminals

XA2EVMD3LC

#### Main

Range of product	Easy Harmony XA2
Product or component type	Monolithic pilot light
Device short name	XA2
Mounting diameter	22.5 mm
Shape of signaling unit head	Round
Cap/operator or lens colour	Green
Light source	LED
Bulb base	Integral LED
[Us] rated supply voltage	220 V DC

## Complementary

J		
Terminals description ISO n°1	(X1-X2)PL	
Device mounting	Fixing hole 22.3 +0.4/0 conforming to IEC 60947-5-1	
Fixing center	>= 30 x 40 mm (support panel) metal - thickness: 16 mm >= 30 x 40 mm (support panel) plastic - thickness: 26 mm	
Fixing mode	Fixing nut beneath head recommended torque: 2.2 N.m (+/- 0.2 N.m)	
Marking	CCC CE	
[Us] rated supply voltage	220 V	
Connections - terminals	Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to IEC 60947-1 Screw clamp terminals, 1 x 0.51 x 2.5 mm² without cable end conforming to IEC 60947-1	
Shape of screw head	Cross compatible with Philips No 2 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver	
[Ui] rated insulation voltage	400 V (pollution degree 3) conforming to IEC 60947-1	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1	
Signalling type	Steady	
Supply voltage limits	0.81.2 V DC	
Current consumption	<= 20 mA	
Service life	40000 h at rated voltage and 25 °C	
Height	29 mm	
width	29 mm	
Depth	53 mm	

Net weight 0.02 kg

#### **Environment**

Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-2570 °C	
Overvoltage category	Class I conforming to IEC 536	
IP degree of protection	IP65 conforming to IEC 60529	
IK degree of protection	IK05	
Standards	IEC 60947-1 GB 14048.1 GB 14048.5 IEC 60947-5-1 IEC 60529 IEC 50102	
Product certifications	CE CCC	
Vibration resistance	5 gn (f= 12500 Hz) conforming to IEC 60068-2-6	
Shock resistance	30 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27	

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	3.000 cm
Package 1 Length	5.500 cm
Package 1 Weight	20.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	160
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.556 kg
Unit Type of Package 3	P06
Number of Units in Package 3	2560
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	64.896 kg

# **Environmental Data**

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

How this information helps you >

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	239	

#### **Use Better**


Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration

## **Use Again**

○ Repack and remanufacture	
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Take-back	No

#### **Dimensions Drawings**

#### **Dimensions**

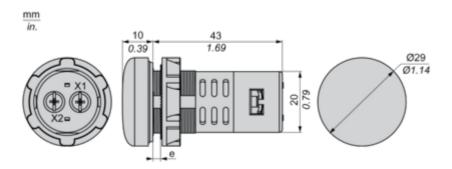

e: Calmping thickness:1 to 6 mm/0.04 to 0.24 in.


### **Product datasheet**

#### XA2EVMD3LC

#### Mounting and Clearance

Panel Cut-Out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

#### **Connection by Screw Clamp Terminals**

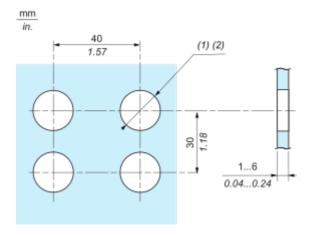

- (1) Diameter on finished panel or support
- (2) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

Connections and Schema


#### Wiring Diagram



(1) LED

#### **Technical Illustration**

#### **Dimensions**

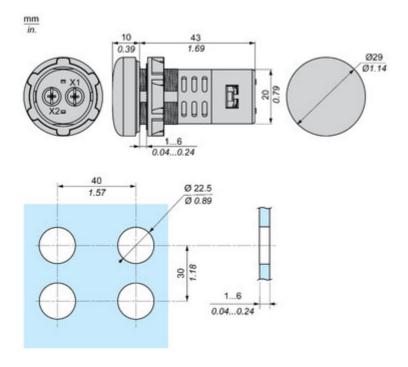

**Technical Illustration** 

Wiring diagram

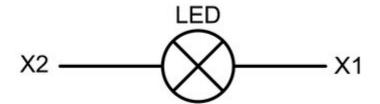


Image of product / Alternate images

#### **Alternative**













Image of product in real life situation

