# Disclaimer. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

# Linergy FT - Comb busbar - 63 A - 4 tap-offs - 54 mm pitch



GV2G454

# Main

| Range                                       | Linergy                                       |
|---|---|
| Product name                                | FT  |
| Device short name                           | GV2G  |
| Product or component type                   | Comb busbar                                   |
| Accessory / separate part category          | Connection accessory                          |
| Poles description                           | 3P  |
| Range compatibility                         | TeSys Deca<br>TeSys GV2<br>TeSys K<br>TeSys U |
| Number of tap-offs                          | 4   |
| [Ith] conventional free air thermal current | 63 A  |
| Connection pitch                            | 54 mm   |

# Complementary

| Mounting location             | On terminal |
|-------------------------------|-------------|
| [Ui] rated insulation voltage | 690 V       |
| Length                        | 206 mm      |
| Net weight                    | 0.085 kg    |

# **Packing Units**

| Unit Type of Package 1       | PCE       |
|------------------------------|-----------|
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 1.900 cm  |
| Package 1 Width              | 3.700 cm  |
| Package 1 Length             | 21.600 cm |
| Package 1 Weight             | 88.000 g  |
| Unit Type of Package 2       | S01       |
| Number of Units in Package 2 | 50        |
| Package 2 Height             | 15.000 cm |
| Package 2 Width              | 15.000 cm |
| Package 2 Length             | 40.000 cm |
| Package 2 Weight             | 4.550 kg  |

| Unit Type of Package 3       | P06        |
|------------------------------|------------|
| Number of Units in Package 3 | 1600       |
| Package 3 Height             | 75.000 cm  |
| Package 3 Width              | 60.000 cm  |
| Package 3 Length             | 80.000 cm  |
| Package 3 Weight             | 156.500 kg |

# **Contractual warranty**

Warranty 18 months

# **Environmental Data**

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

How this information helps you >

| ⊘ Environmental footprint |                               |
|---------------------------|-------------------------------|
| Environmental Disclosure  | Product Environmental Profile |

# **Use Better**

| Packaging made with recycled cardboard | No                     |
|--|------------------------|
| Packaging without single use plastic   | No                     |
| EU RoHS Directive                      | Compliant              |
| REACh Regulation                       | REACh Declaration      |
| China RoHS Regulation                  | China RoHS declaration |


# **Use Again**

| ○ Repack and remanufacture |                         |
|----------------------------|-------------------------|
| Circularity Profile        | End of Life Information |
| Take-back                  | No                      |

### **GV2G454**

# **Dimensions Drawings**

# Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

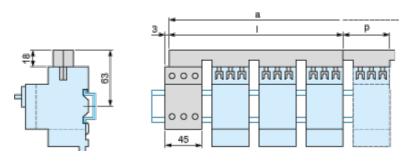

|                     | 1   | р  |
|---------------------|-----|----|
| GV2G445 (4 x 45 mm) | 179 | 45 |
| GV2G454 (4 x 54 mm) | 206 | 54 |
| GV2G472 (4 x 72 mm) | 260 | 72 |

| Number of ten offe | а   |     |     |     |
|--------------------|-----|-----|-----|-----|
| Number of tap-offs | 5   | 6   | 7   | 8   |
| GV2G445            | 224 | 269 | 314 | 359 |
| GV2G454            | 260 | 314 | 368 | 422 |
| GV2G472            | 332 | 404 | 476 | 548 |